U.S. DEPARTMENT OF HOMELAND SECURIT Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

# CB20-0441

# Important: Follow the instructions on pages 1-9

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner

	SECT	ION A - PROPERTY	INFORMATION	F	OR INSUR	ANCE COMPANY USE	
A1. Building Owner's Name Taylor Morrison of Florida Inc					olicy Numl	per	
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 2512 Coral Ct					Company NAIC Number		
City			State	Z	IP Code		
	Indian Rocks Beach FL 33785						
			x Parcel Number, Lega 2gs 23-24) Permit # T				
A4. Building Use (e	g Resident	ial, Non-Residential,	Addition, Accessory, el	c) Residential - Unit in	n Altache	д Томпһоте	
A5 Latitude/Longit	ude Lat	N27°54'26.2"	Long. <u>W82°50'46</u> .	9 " Horizontal Datum	☐ NAD 1	927 X NAD 1983	
A6, Attach at least	2 photograph	s of the building if the	Certificate is being us	ed to obtain flood insuran	ce		
A7. Building Diagra	m Number	7					
A8 For a building v	vith a crawlsp	pace or enclosure(s)					
a) Square foot	age of crawls	pace or enclosure(s)	704 so	ą ft			
b) Number of p	ermanent flo	od openings in the cra	awispace or enclosure	(s) within 1.0 foot above a	djacent gra	ade 8	
c) Total net are	ea of flood op	enings in A8.b 17	92 sq in				
d) Engineered	flood opening	gs? X Yes N	0				
A9. For a building v	vith an attach	ed garage					
		ed garage N/A	sq ft				
			ached garage within 1	0 foot above adjacent gra	ade	N/A	
c) Total net are	ea of flood op	enings in A9.b	N/A sq in				
d) Engineered	flood opening	gs? Yes X	10				
	SE	CTION B - FLOOD I	NSURANCE RATE	MAP (FIRM) INFORMAT	ION		
B1. NFIP Communi	ty Name & C	ommunity Number	B2 County N	lame		B3. State	
City of Indian	Rocks Bear	h 125117C	Pinellas	County		C.	
	r tooks boat	1231170		County		FL	
B4 Map/Panel Number	B5. Suffix	B6 FIRM Index Date	B7 FIRM Panel Effective/ Revised Date	B8. Flood Zone(s)	(Zor	le Flood Elevation(s) ne AO, use Base	
B4 Map/Panel	1	B6: FIRM Index	Effective/	1	(Zor	e Flood Elevation(s)	
B4 Map/Panel Number  12103C0111  B10 Indicate the s	B5. Suffix  G ource of the 8	B6. FIRM Index Date 08/18/2009  Base Flood Elevation Community Determine	Effective/ Revised Date 09/03/2003  (BFE) data or base flo	B8. Flood Zone(s)  AE  od depth entered in Item E	(Zor Floo	l e Flood Elevation(s) ne AO, use Base d Depth)	
B4 Map/Panel Number  12103C0111  B10 Indicate the s  FIS Profile  B11 Indicate elevation	B5 Suffix  G ource of the 8	B6 FIRM Index Date  08/18/2009  Base Flood Elevation Community Determined for BFE in Item B	Effective/ Revised Date 09/03/2003  (BFE) data or base flomined X Other/Sour	B8. Flood Zone(s)  AE  od depth entered in Item E  ce. SEE COMMENTS  K NAVD 1988  Other	(Zor Floo 39	e Flood Elevation(s) ne AO, use Base od Depth) 11.4'	
B4 Map/Panel Number  12103C0111  B10 Indicate the s  FIS Profile  B11 Indicate eleva	B5 Suffix  G ource of the 8	B6 FIRM Index Date  08/18/2009  Base Flood Elevation Community Determined for BFE in Item B	Effective/ Revised Date 09/03/2003  (BFE) data or base flomined X Other/Sour	B8. Flood Zone(s)  AE  od depth entered in Item E	(Zor Floo 39	e Flood Elevation(s) ne AO, use Base od Depth) 11.4'	
B4 Map/Panel Number  12103C0111  B10 Indicate the s  FIS Profile  B11 Indicate eleva	B5. Suffix  G ource of the 8 FIRM ation datum uses located in a	B6 FIRM Index Date  08/18/2009  Base Flood Elevation Community Deterrised for BFE in Item B  Coastal Barrier Reso	Effective/ Revised Date 09/03/2003  (BFE) data or base flomined X Other/Sour	B8. Flood Zone(s)  AE  od depth entered in Item E  ce. SEE COMMENTS  K NAVD 1988  Other	(Zor Floo 39	e Flood Elevation(s) ne AO, use Base od Depth) 11.4'	

# ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

	the corresponding information from Secti		FOR INSURANCE COMPANY USE
Building Street Address (including Apt 2512 Coral Ct	, Unit, Suite, and/or Bldg, No.) or P.O. Route	and Box No.	Policy Number.
City	State ZIP C	ode	Company NAIC Number
Indian Rocks Beach	FL 3378	5	
SECTION	C - BUILDING ELEVATION INFORMATION	ON (SURVEY R	EQUIRED)
C1. Building elevations are based or	,	ng Under Constr	uction* X Finished Construction
	be required when construction of the building		
C2 Elevations – Zones A1–A30, AE Complete Items C2 a-h below a Benchmark Utilized Box in GI @ N	, AH, A (with BFE), VE, V1–V30, V (with BFE) according to the building diagram specified in NE Com Lot 4 Elev = 4.01 Vertical Datum:	Item A7: In Puer	RAE, AR/A1-A30, AR/AH, AR/AO to Rico only, enter meters
	or the elevations in items a) through h) below D 1988		
	ons must be the same as that used for the BF	E,	Check the measurement used.
a) Top of bottom floor (including	g basement, crawlspace, or enclosure floor)	6.2	X feet  meters
b) Top of the next higher floor		<u>16</u> . <u>8</u>	X feet  meters
c) Bottom of the lowest horizon	tal structural member (V Zones only)	N/A	feet   meters
d) Attached garage (top of slat	)	N/A	feet meters
e) Lowest elevation of machine     (Describe type of equipment)	ry or equipment servicing the building and location in Comments)	<u>14</u> . 9	X feet meters
f) Lowest adjacent (finished) g	rade next to building (LAG)	5.4	X feet meters
g) Highest adjacent (finished) g	grade next to building (HAG)	6.0	x feet meters
h) Lowest adjacent grade at low structural support	west elevation of deck or stairs, including	N/A	feet meters
SECTIO	N D - SURVEYOR, ENGINEER, OR ARC	HITECT CERTI	FICATION
I certify that the information on this (	sealed by a land surveyor, engineer, or arch Certificate represents my best efforts to interp e or imprisonment under 18 U.S. Code, Secti	oret the data avai	by law to certify elevation information. ilable, I understand that any false
	on A provided by a licensed land surveyor?	_	X Check here if attachments
Certifier's Name	License Number		
Scott R. Fowler	LS5185		= /}
Title			le
Professional Surveyor and Map	per		1730W
Company Name			I WILL
Landmark Engineering & Survey	ying Corp.		
Address			Ju -
8515 Palm River Road		7:0.0	0/1/21
City Tampa	State FL	ZIP Code 33619	LS5185 8/14/2021
Signature A A A A A A A A A A A A A A A A A A A	Date 8-14-2021	Telephone 813-621-7841	
Copy all pages of this Elevation Certif	icate and all attachments for (1) community of	ficial, (2) insurano	e agent/company, and (3) building owne
Not valid without the original signature and Longitude obtained with a hand held GPS of total net area of flood openings in A8c is ca 200 square feet, 3 non engineered vents in enclosure overhead door each certified to to	nent and location, per C2(e), if applicable) seal of a Florida Registered Surveyor and Mapper or device. The equipment referenced in C2e is the air constituted as follows: 3 Smart Vent Insulated Flood Vent an enclosure wall each measuring 16" x 16.5" and 2 handle 200 square feet. Attachment: ICC-ES Elevational Flood Insurance Program" (Unit 4 Using NFIP Stu	onditioner, located or hts (model 1540-520 Smart Vent Insulate in Report ESR-2074	utside the structure, along the left side wall. The in the enclosure walls each certified to handled Flood Vents (model 1540-524) in the Attachment: Page 4-6 of "Managing"

ELEVATION CERTIFICATE			OMB No. 1660-0008 Expiration Date: November 30, 2022
IMPORTANT: In these spaces, copy the correspon	iding information fro	om Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, a 2512 Coral Ct	nd/or Bldg. No.) or P.	O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
Indian Rocks Beach	FL	33785	
SECTION E – BUILDING E FOR ZO	LEVATION INFORI NE AO AND ZONE	MATION (SURVEY NO A (WITHOUT BFE)	)T REQUIRED)
For Zones AO and A (without BFE), complete Items is complete Sections A, B,and C. For Items E1–E4, use enter meters.			
E1. Provide elevation information for the following at the highest adjacent grade (HAG) and the lowes a) Top of bottom floor (including basement,	nd check the appropri it adjacent grade (LAG	ate boxes to show whet G).	her the elevation is above or below
crawlspace, or enclosure) is		feet me	ters above or below the HAG.
<ul> <li>Top of bottom floor (including basement, crawlspace, or enclosure) is</li> </ul>		feet _ me	ters above or below the LAG.
E2. For Building Diagrams 6-9 with permanent floor	l openings provided li	n Section A Items 8 and	or 9 (see pages 1-2 of Instructions),
the next higher floor (elevation C2.b in the diagrams) of the building is			iters above or below the HAG.
E3. Attached garage (top of slab) is		feet me	
E4. Top of platform of machinery and/or equipment servicing the building is		[feet ] me	ters above or below the HAG.
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes			
SECTION F - PROPERTY O	WNER (OR OWNER'	S REPRESENTATIVE)	CERTIFICATION,
The property owner or owner's authorized represent community-issued BFE) or Zone AO must sign here.	ative who completes the statements in Se	Sections A, B, and E for ections A, B, and E are o	Zone A (without a FEMA-issued or correct to the best of my knowledge.
Property Owner or Owner's Authorized Representati	ve's Name		
Address	Ci	ty	State ZIP Code
Signature	Da	ate	Telephone
Comments			
			Check here if attachments.

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

MPORTANT: In these spaces, copy the corre			FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Sui	te, and/or Bidg. No.)	or P.O. Route and Box No.	Policy Number:
2512 Coral Ct			
City	State	ZIP Code	Company NAIC Number
Indian Rocks Beach	FL	33785	
SECTION	G-COMMUNITY	INFORMATION (OPTIONA	L)
The local official who is authorized by law or ord Sections A, B, C (or E), and G of this Elevation ( used in Items G8-G10. In Puerto Rico only, ento	Certificate, Complete er meters,	the applicable item(s) and	sign below. Check the measurement
G1. The information in Section C was take engineer, or architect who is authorize data in the Comments area below.)	d by law to certify et	evation information. (Indicat	e the source and date of the elevation
G2. A community official completed Section or Zone AO.	n E for a building lo	cated in Zone A (without a F	EMA-issued or community-issued BFE)
G3. The following information (Items G4–C	310) is provided for o	community floodplain manag	gement purposes.
G4. Permit Number	G5. Date Permit Is	sued G	Date Certificate of     Compliance/Occupancy Issued
•		Substantial Improvement	
G8. Elevation of as-built lowest floor (including of the building:	basement)	□	feet  meters Datum
G9. BFE or (in Zone AO) depth of flooding at t	he building site:		feet meters Datum
G10. Community's design flood elevation:		□	feet  meters Datum
Local Official's Name		Title	
Community Name		Telephone	
Signature		Date	
Comments (including type of equipment and loc	ation, per C2(e), if a	pplicable)	
			(
			Check here if attachments.

# **BUILDING PHOTOGRAPHS**

# **ELEVATION CERTIFICATE**

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

				Expiration Data Moralina Co. Edge	
IMPORTANT: In these	FOR INSURANCE COMPANY USE				
Building Street Addres	Policy Number:				
2512 Coral Ct	2512 Coral Ct				
City		State	ZIP Code	Company NAIC Number	
Indian Rocks Beach	1	FL	33785		

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption

Front View 08/12/2021



Photo Two Caption

Rear View 08/12/2021

# **BUILDING PHOTOGRAPHS**

# **ELEVATION CERTIFICATE**

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

			=
IMPORTANT: In these spaces, copy th	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., 2512 Coral Ct	Policy Number		
City	State	ZIP Code	Company NAIC Number
Indian Rocks Beach	FL	33785	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo One Caption

Rear Wall Vent 08/12/2021

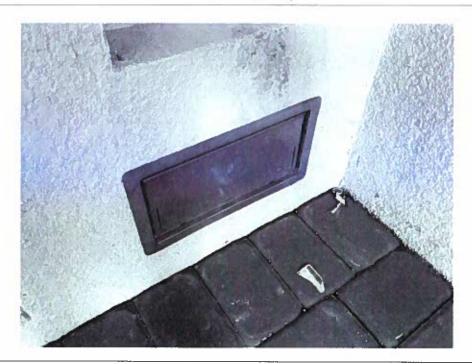


Photo Two Caption

Intentionally Left Blank

# **BUILDING PHOTOGRAPHS**

# **ELEVATION CERTIFICATE**

Continuation Page

OMB No 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the	FOR INSURANCE COMPANY USE Policy Number:		
Building Street Address (including Apt., Ur 2512 Coral Ct			
City	State	ZIP Code	Company NAIC Number
Indian Rocks Beach	FL	33785	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below Identify all photographs with date taken; "Front View" and "Rear View", and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo One Caption

Rear Wall Vent 08/12/2021

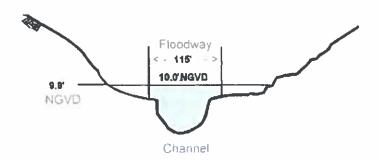


Figure 4-3: Representation of cross-section A of the Rocky River

The area of the floodway here is 1,233 square feet. This is the cross sectional area of the floodway below the elevation of the base flood at this location (the shaded area of Figure 4-3). It is used to determine water velocity. The average or mean velocity of the base flood in the floodway is 6.1 feet per second.

Of the last four columns under "Base Flood Water Surface Elevation," you should be concerned only with the first one, "Regulatory," which provides the regulatory flood elevation. This is equivalent to the 100-year flood elevation or BFE. The other columns depict the increase in water-surface elevation if the floodplain is encroached upon so that the water-surface elevation is increased no more than 1 foot. This amount of encroachment is used to define the floodway width. Notice that at no cross section is the increase more than 1.0 foot, in accordance with NFIP standards.

# COASTAL AND LAKE ELEVATIONS

Coastal flood elevations. Table 4, Transect Descriptions, on page 12 in the FIS report for Flood County, shows the stillwater elevations and the maximum wave crest elevations of 100-year flood events along the coast.

Coastal regulatory flood elevations include the increase due to wave height. Therefore, use the BFE from the FIRM, not the stillwater elevations in the table.

The base flood elevations on the FIRM are rounded to the nearest foot, which means that if a base flood elevation was actually 8.3 feet, it would show as 8 feet on the FIRM. To correct for this, the recommended rule of thumb is to add 0.4 foot to the rounded BFE on the FIRM. This makes sure that the regulatory elevation you use will be high enough.

For the coast, use the base flood elevation from the FIRM (plus 0.4 foot), not the table.

Lake flood elevations. On inland lakes and reservoirs, the FIS generally does not include the effects of waves. For these areas, information on base flood elevations is contained in Section 3.0 of the FIS report, and data is presented in a table titled Summary of Stillwater Elevations. Note that in this table the BFE is shown to the nearest one-tenth



Most Widely Accepted and Trusted

# **ICC-ES Evaluation Report**

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

**ESR-2074** 

Reissued 02/2021 This report is subject to renewal 02/2023.

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 45— VENTS/FOUNDATION FLOOD VENTS

## **REPORT HOLDER:**

# **SMART VENT PRODUCTS, INC.**

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS; MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514; FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"

A Subsidiary of CODE CODE

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



Copyright © 2021 ICC Evaluation Service, LLC. All rights reserved.



# **ICC-ES Evaluation Report**

**ESR-2074** 

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 EVALUATION SCOPE

#### Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code<sup>®</sup> (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>‡</sup>

The ADIBC is based on the 2009 IBC 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### **2.0 USES**

The Smart Vent<sup>§</sup> units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent\* FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent<sup>®</sup> Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT<sup>®</sup> Stacking Model #1540-511 and FloodVENT<sup>®</sup> Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT<sup>®</sup> Model #1540-510 and SmartVENT<sup>®</sup> Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT<sup>®</sup> Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

#### 3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT<sup>®</sup> Model #1540-520. It is a Homasote 440 Sound Barrier<sup>®</sup> (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

#### 4.0 DESIGN AND INSTALLATION

#### 4.1 SmartVENT<sup>5</sup> and FloodVENT<sup>8</sup>:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square





feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

#### 4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT<sup>8</sup> Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

# 5.0 CONDITIONS OF USE

The Smart Vent<sup>®</sup> FVs described in this report comply with, or are suitable alternatives to what is specified in those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent<sup>8</sup> FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent<sup>®</sup> FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

#### 6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

#### 7.0 IDENTIFICATION

- 7.1 The Smart VENT<sup>®</sup> models and the Ftood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

**TABLE 1—MODEL SIZES** 

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT®	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT <sup>®</sup> Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT <sup>®</sup>	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Stacker	1540-511	16" X 16"	400
FloodVent <sup>®</sup> Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m2

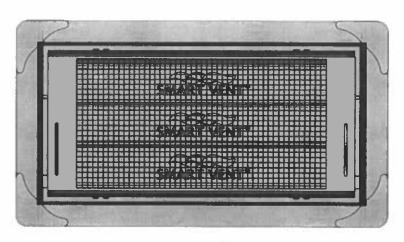


FIGURE 1-SMART VENT: MODEL 1540-510

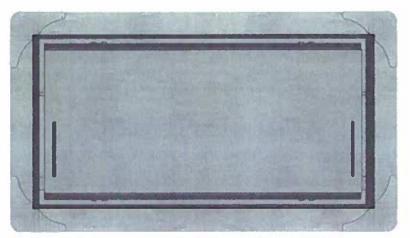


FIGURE 2—SMART VENT MODEL 1540-520

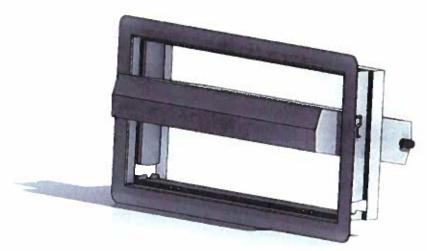


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

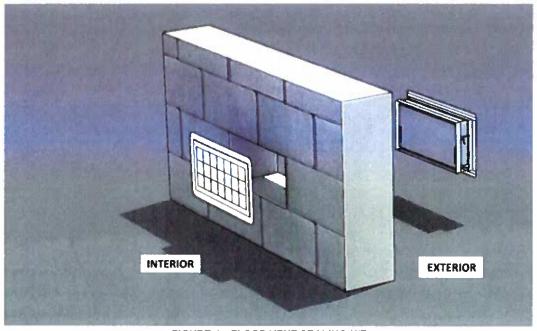


FIGURE 4—FLOOD VENT SEALING KIT



# ICC-ES Evaluation Report

# **ESR-2074 CBC and CRC Supplement**

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-524; #1540-514; #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent<sup>®</sup> Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

#### Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

#### 2.0 CONCLUSIONS

#### 2.1 CBC:

The Smart Vent<sup>®</sup> Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 *International Building Code* (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

#### 2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 *International Residential Code*® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021.





# ICC-ES Evaluation Report

# **ESR-2074 FBC Supplement**

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

#### 2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the Florida Building Code-Building and the FRC, provided the design and installation are in accordance with the 2015 International Building Code<sup>®</sup> provisions noted in the evaluation report.

Use of the Smart Vent<sup>®</sup> Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2021.



