## **ELEVATION CERTIFICATE**

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to mine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

		SECTION A PRO	PERTY INFO	RMATION		FOR INSURANCE COMPANY USE
BUILT	DING OWNER'S NAME					POLICY NUMBER
STRH	Sun Sot B LET ADDRESS (Including Ap 126, 128 8	t., Unit, Suite and/or Bldg. N	Pers, Inc Jumber, OR P.O. R Male			COMPANY NAIC NUMBER
OTHE	A DESCRIPTION (Lot and	Block Numbers, etc.)				
CITY	1 20+13, 14 st 2 Indian		Bead		STATE F1	ZIP CODE 34638
			ARUSHI DOO.	NCE RATE MAP (FIRM)	INFORMATION	
Provi	de the following from the	he proper FIRM (See	Instructions):			
	COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	S. FIRM ZONE	6. BASE FLOOD ELEVATION (In AO Zones, use depth)
	125117	003	B	6-84	A-11	10.00
8 F	on Zones A or V, where	no BFE is provided o	n the FIRM, ar		ablished a BFE (	Other (describe on back) or this building site, indicate
	· · · · · · · · · · · · · · · · · · ·	SECTI	ON C BUILDI	NG ELEVATION INFORM	MATION	
(d)	escribes the subject but FIRM Zones A1-A30. of 1997 feet FIRM Zones V1-V30, the selected diagram, FIRM Zone A (without below 1997 (check one) the highest grade level) elevated in according to the firm of the fi	pilding's reference lev AE, AH, and A (with let NGVD-(or other FIF VE, and V (with BFE) is at an elevation of EBFE). The floor use of the highest grade at floor used as the reference with the compart of the build or dance with the compart of the property of the B, Item 7], then convents on Page 2.)  It was appears on FI at the day and a present on Elion of the build or the bustruction is complete.	BFE). The top RM datum—see The bottom das the refere diacent to the b rence level froiting. If no flood munity's floodp letermining the elevation dature art the elevation RM: Yes Tactual constri- valid if the build ilding during the	Section B, Item 7). of the lowest horizontal st leet NGVD (or other FIF nce level from the selecte duilding. In the selected diagram is depth number is available an management ordinant above reference level elements to the datum system used in measuring the constructions of the datum system of the s	refrom the select ructural member RM datum—see S d diagram is determined by the building ce? Yes seed on the FIRM on Page 4) rawings a reference level A post-constructions.	ed diagram is at an elevation  of the reference level from ection B, Item 7).
Se	ection B. Item 7).	est grade immediately	adjacent to th	e bullding is: LIII5	leet NGVD	(or other FIRM datum-see
<u>:</u>		S	ECTION D CO	OMMUNITY INFORMATION	ON	
1 15	not the lowest llook fa	rdinance is:	nunity's floodpl	lain management ordinan NGVD (or other FIRM dati	ce, the elevation	ndicated in Section C, Item 1 of the building's *lowest B, Item 7).
FEM	A Form 81-31, MAY-90	1-0°35	REPLACI	ES ALL PREVIOUS EDITIONS	SEE	REVERSE SIDE FOR CONTINUATION

6-18-26


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or A	ffix Seal)
David F Ramsey	15307	
me,	COMPANY NAME	
Protossional Engineer		
DDRESS	Dunedin	STATE ZIP
434 Stinger Blud	Dunecin	F1 34688
IGNATURE ( ) Po	0ATE 4-18-96	734-7020
Copies should be made of this Cartificate for	:1) community official, 2) insurance ager	nt/company, and 3) building owner.
Copies should be made of this Certificate for:	: 1) community official, 2) insurance ager	nt/company, and 3) building owner.
	: 1) community official, 2) insurance ager	nt/company, and 3) building owner.
Copies should be made of this Certificate for	1) community official, 2) insurance ager	nt/company, and 3) building owner.
	: 1) community official, 2) insurance ager	nt/company, and 3) building owner.
	: 1) community official, 2) insurance ager	nt/company, and 3) building owner.
	: 1) community official, 2) insurance ager	nt/company, and 3) building owner.
	: 1) community official, 2) insurance ager	nt/company, and 3) building owner.
	: 1) community official, 2) insurance ager	nt/company, and 3) building owner.

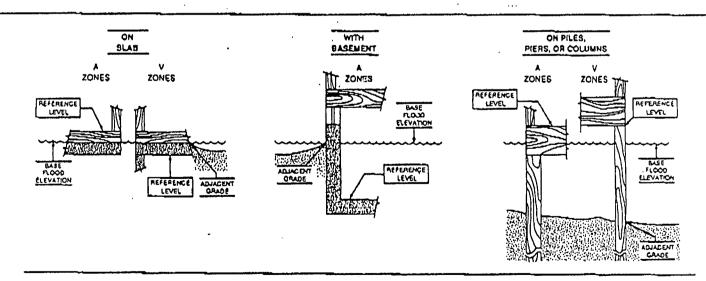

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structured member.